



MERCHANT BAR REFERENCE GUIDE: TAPERED FLANGE BEAMS

| Designation | Weight | Surface Area | Depth of Section d | Width of Flange b_f | Thickness of Flange t_f | Web Thickness t_w | Depth between Flanges d_1 |
|-------------|--------|-------------------|-------------------------|--------------------------|------------------------------|------------------------|--------------------------------|
| | kg/m | m ² /m | mm | mm | mm | mm | mm |
| 125TFB | 13.1 | 0.470 | 125 | 65 | 8.5 | 5.0 | 108 |
| 100TFB | 7.2 | 0.349 | 100 | 45 | 6.0 | 4.0 | 88 |

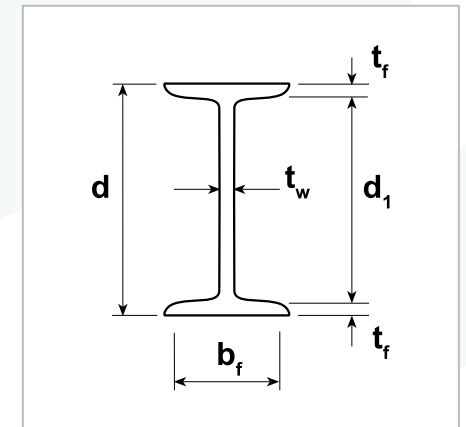

- Manufactured in accordance with the requirements of Australian Standard AS/NZS 3679.1 2016 in Grade 300.
- Grade 350 & 350L0 available on request.
- Non-standard lengths or cut to size on request.

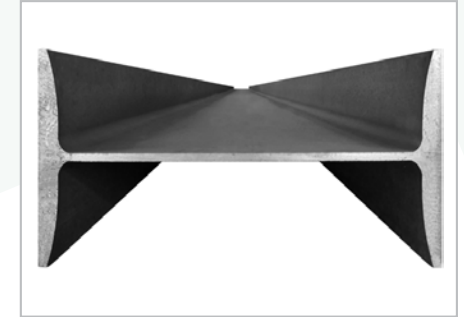